
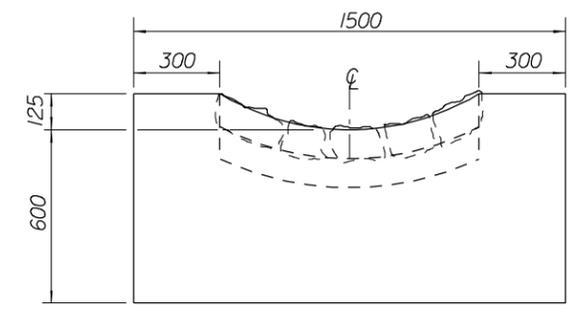


NOTES:


1. Unless otherwise shown, dimensions are in millimeters.
2. The approximate shape of the paved waterway is an arc with a radius of 880 mm.
3. At inlets and other special locations, widen and shape paved waterway to drain.
4. For concrete and rubble paved waterway construction only:

A. Construct in uniform sections 6 m in length, except closure sections are not to be less than 1.5 m in length. Place expansion joints with curtain walls at 30 m intervals.


B. At the outlet end of each waterway construct a curtain wall on the downstream end of the last section of waterway.

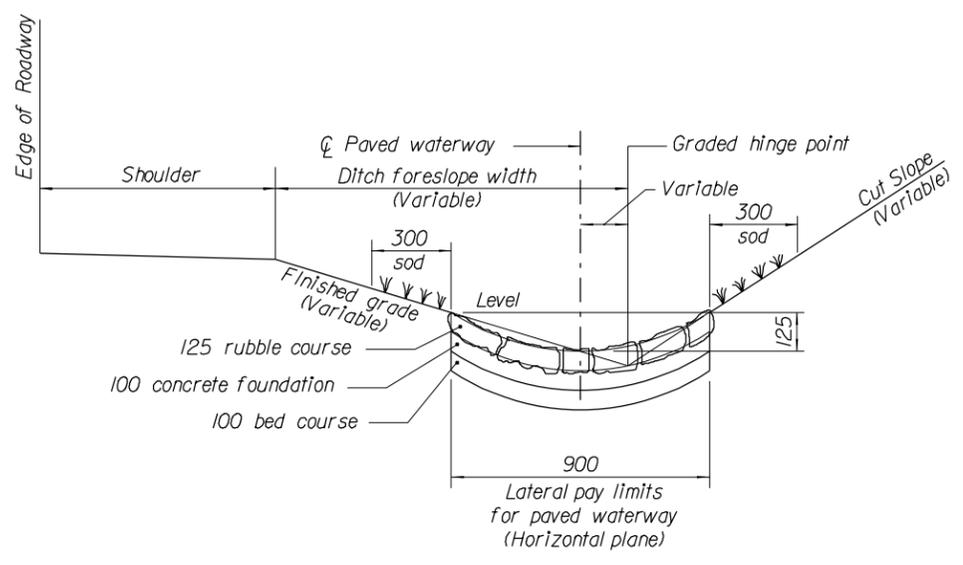

SECTION B-B

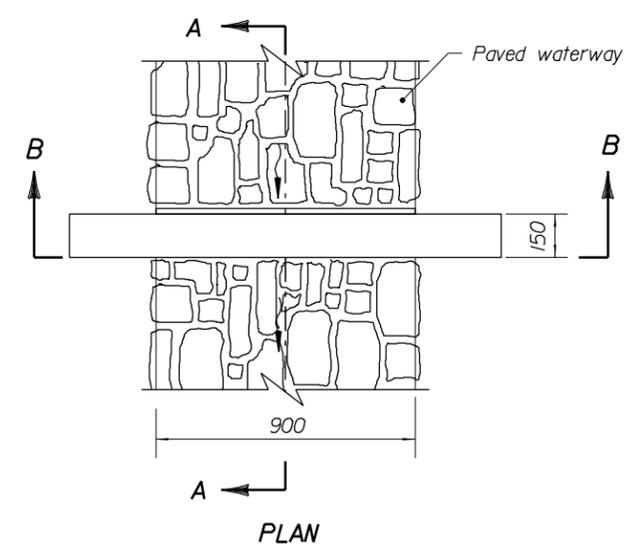

RUBBLE PAVED WATERWAY

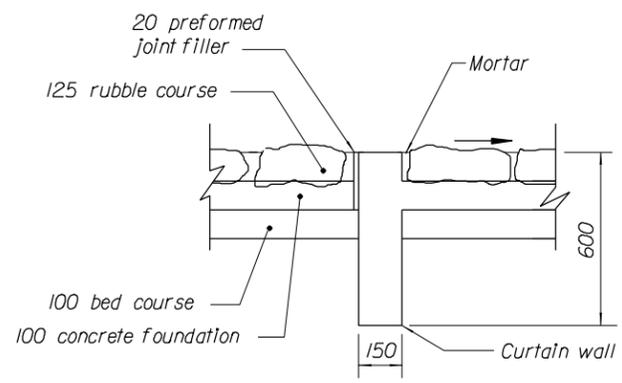

SECTION A-A

NO SCALE

U.S. DEPARTMENT OF TRANSPORTATION FEDERAL HIGHWAY ADMINISTRATION EASTERN FEDERAL LANDS HIGHWAY DIVISION	
METRIC DETAIL	
CONCRETE AND RUBBLE PAVED WATERWAYS	
DETAIL APPROVED FOR USE --/----	DETAIL
REVISED: 07/98	EM608-03