



NOTES:


1. Unless otherwise shown, dimensions are in millimeters.
2. All lumber dimensions are nominal.
3. Paint all wood support members white.
4. Stripes on all barricades are 150 mm wide and sloped downward at a 45 degree angle toward the side of the barricade on which approaching traffic must pass. When the barricade is less than 1 meter wide the stripe width is 100 mm.
5. Sandbags may be used to provide additional stability to barricades. If used, sandbags are not to be placed higher than 300 mm above the ground.
6. Stripe both sides of all rail faces on barricades exposed to traffic from both directions.

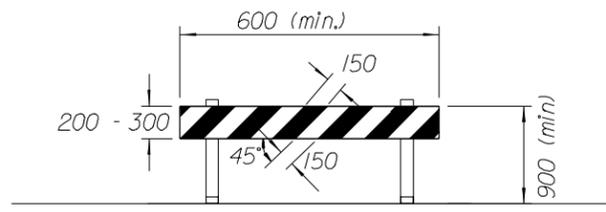

TYPE I BARRICADE

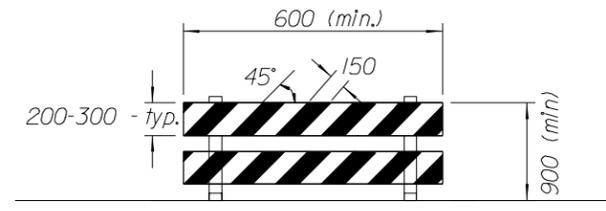


TYPE II BARRICADE

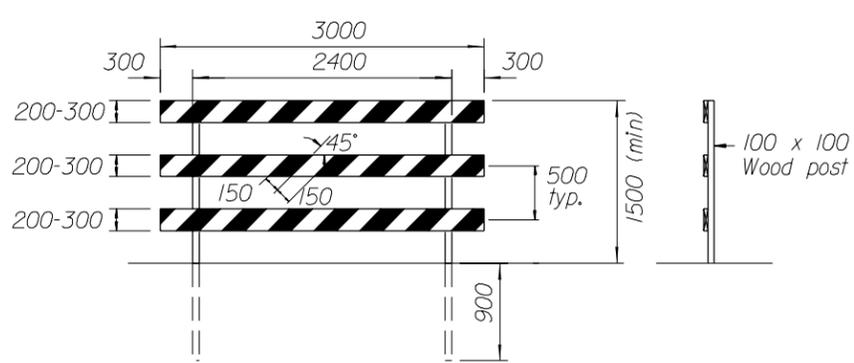


FIXED

TYPE III BARRICADES

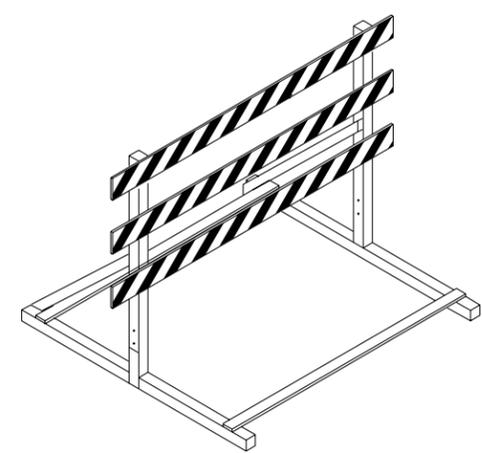


MOVABLE


Dimensions for the movable barricade match the dimensions shown for the fixed barricade

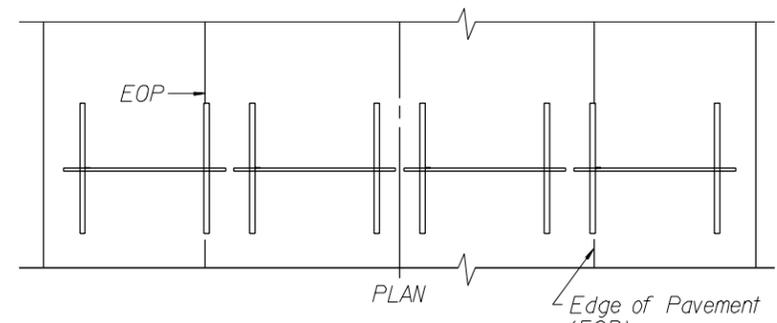


PLAN

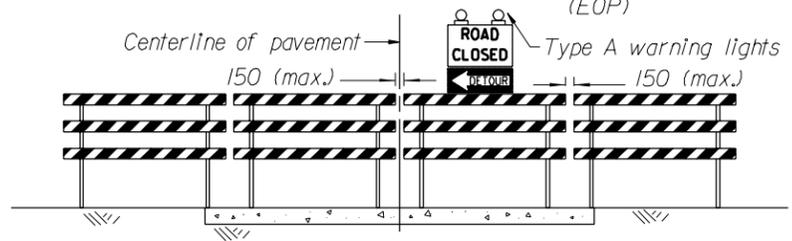

**ELEVATION
ROAD CLOSED TO ALL TRAFFIC**

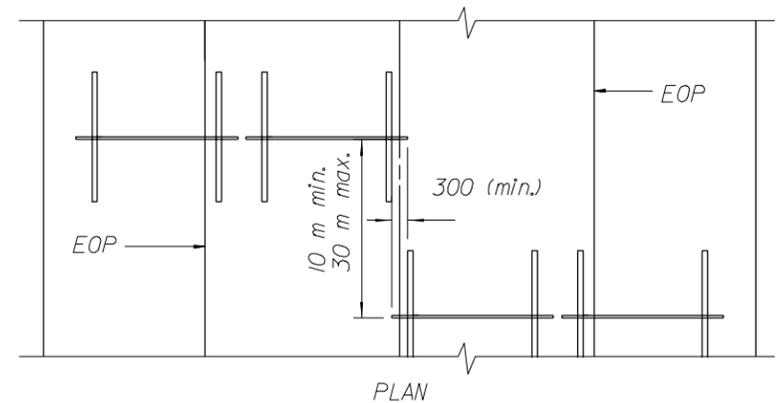

PLAN

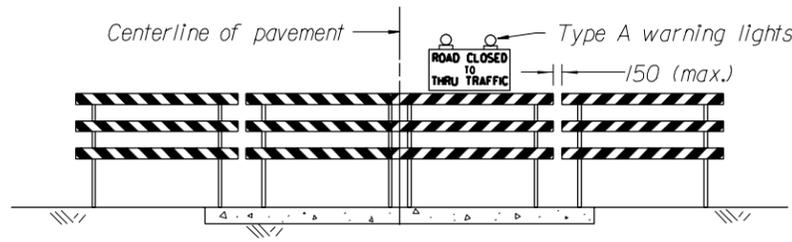

**ELEVATION
ROAD CLOSED TO THRU TRAFFIC
TYPICAL APPLICATION OF THE
TYPE III BARRICADE**

NO SCALE

U.S. DEPARTMENT OF TRANSPORTATION FEDERAL HIGHWAY ADMINISTRATION EASTERN FEDERAL LANDS HIGHWAY DIVISION	
METRIC DETAIL	
CONSTRUCTION TRAFFIC CONTROL BARRICADES	
DETAIL APPROVED FOR USE ---	DETAIL
REVISED: 07/98 08/00	EM635-02