



PLAN

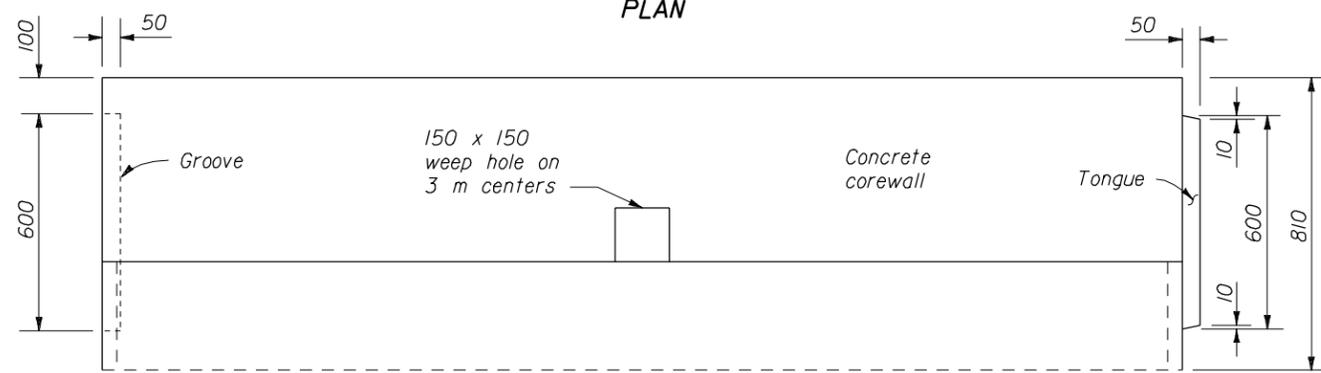


ELEVATION


PRECAST CONCRETE COREWALL

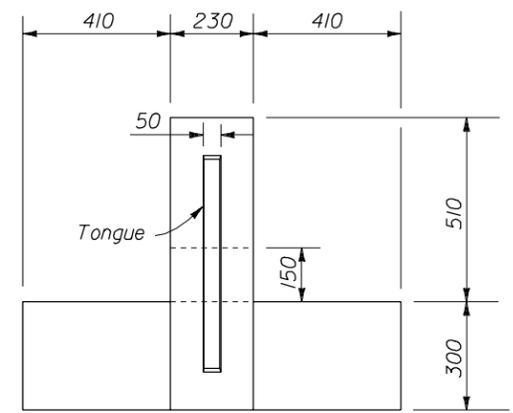

END VIEW

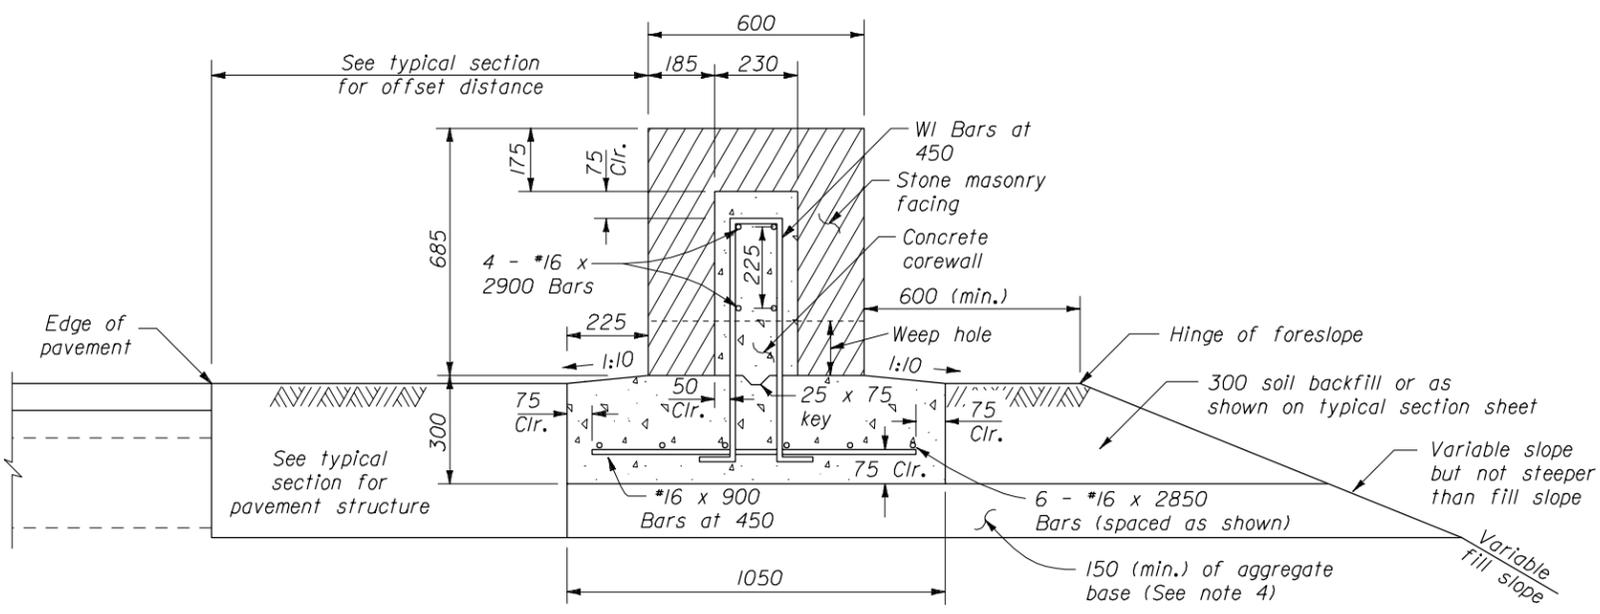

TYPICAL GUARDWALL CROSS SECTION

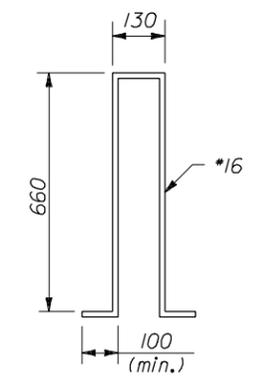

W1 BAR  
BENDING DIAGRAM

- NOTES:
1. Unless otherwise shown, dimensions are in millimeters.
  2. Form construction joints in the corewall at 9 m intervals or, at the option of the Contractor, the corewall may be constructed of precast concrete units.
  3. On curves with radius less than 50 m, the corewall is to be cast-in-place.
  4. The depth of base may be less than 150 mm as directed by the CO, when the foundation is on either rock fill or solid rock.
  5. Set galvanized metal slots with anchors for the stone work or other approved type of metal anchors in the concrete. Equivalent attachment systems are allowed with the approval of the CO.

NO SCALE

U.S. DEPARTMENT OF TRANSPORTATION FEDERAL HIGHWAY ADMINISTRATION FEDERAL LANDS HIGHWAY	
METRIC STANDARD	
STONE MASONRY GUARDWALL	
STANDARD APPROVED FOR USE --/----	STANDARD
REVISED: 12/96 07/98	M620-01

02/27/2003 09:05:16 AM M:\Standard\METRIC\MST62001.DGN