

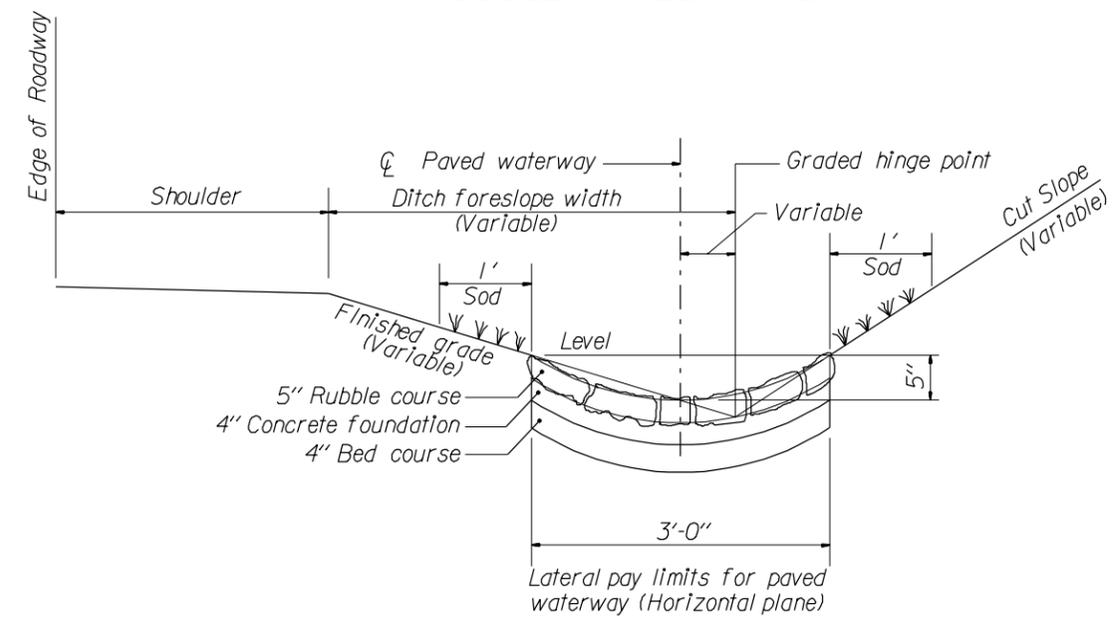


RUBBLE PAVED WATERWAY

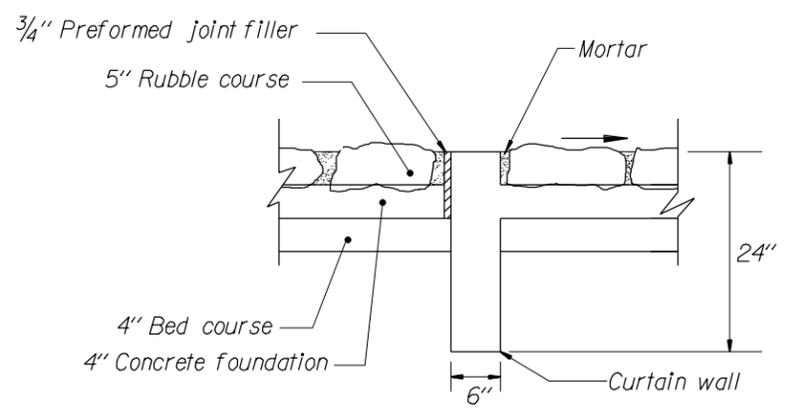


NOTES:

- The approximate shape of the paved waterway is an arc with a radius of 2.9 feet.
- At inlets and other special locations, widen and shape paved waterway to drain.
- For concrete and rubble paved waterway construction only:
 - Construct in uniform sections 20 feet in length, except closure sections are not to be less than 5 feet in length. Place expansion joints, with curtain walls at 100 foot intervals.
 - At the outlet end of each waterway construct a curtain wall on the downstream end of the last section of waterway.

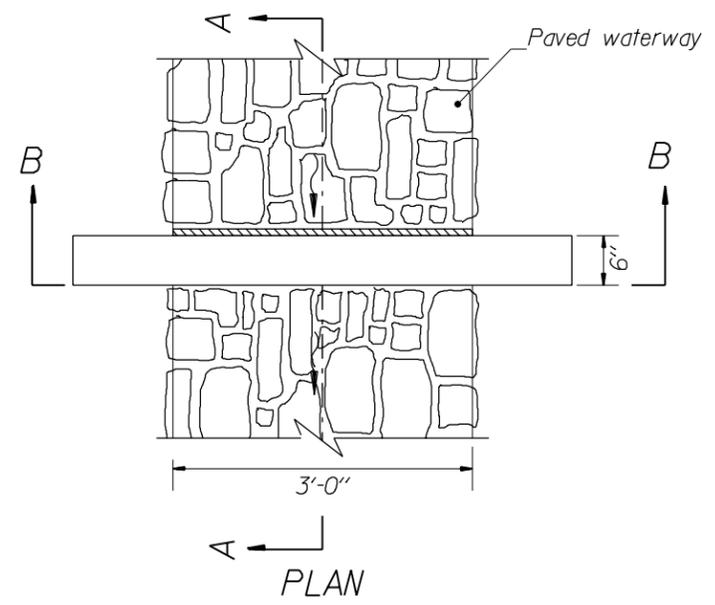

SECTION A-A

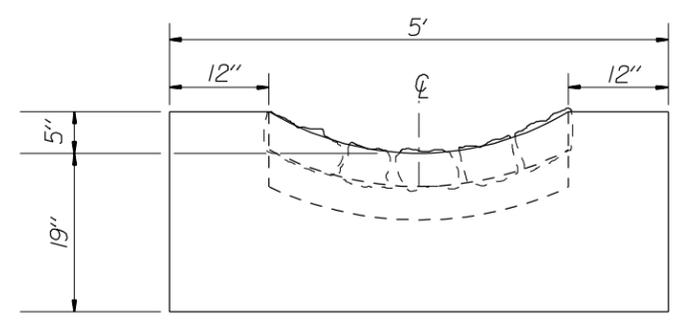

SECTION B-B

02/26/2003 11:00:12 AM M:\Standard\Eng\1\shd1608x03.dgn

U.S. DEPARTMENT OF TRANSPORTATION FEDERAL HIGHWAY ADMINISTRATION EASTERN FEDERAL LANDS HIGHWAY DIVISION	
DETAIL	
CONCRETE AND RUBBLE PAVED WATERWAYS	
REVISID:	DETAIL APPROVED FOR USE --/---
	DETAIL E608-3