




TYPE I BARRICADE

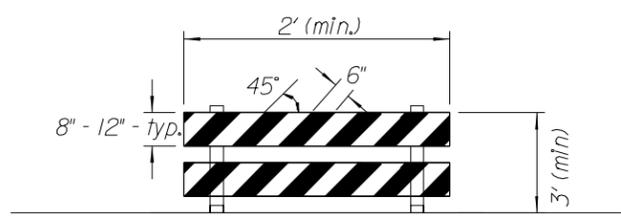

TYPE II BARRICADE

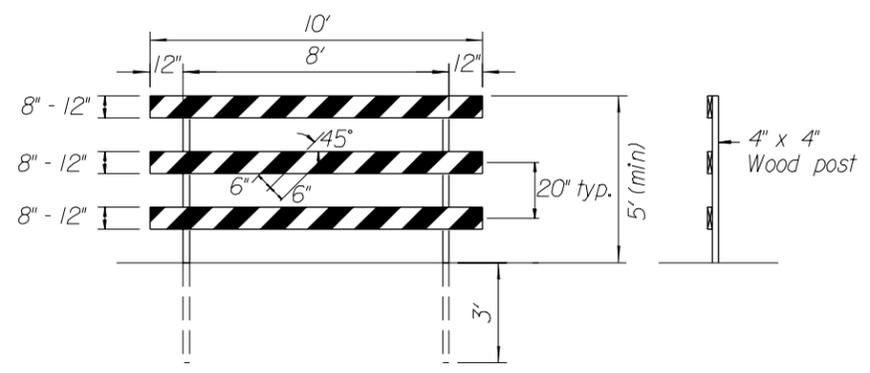


FIXED

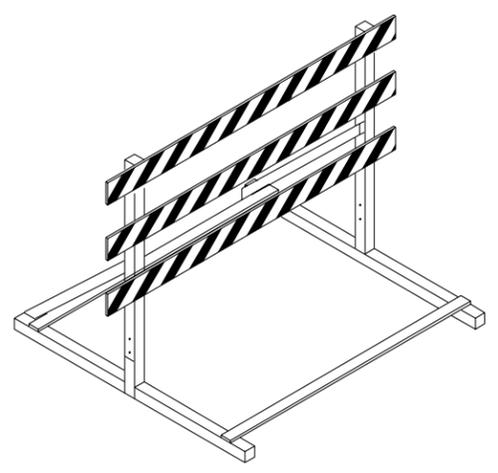


MOVABLE

Dimensions for the movable barricade match the dimensions shown for the fixed barricade

TYPE III BARRICADES

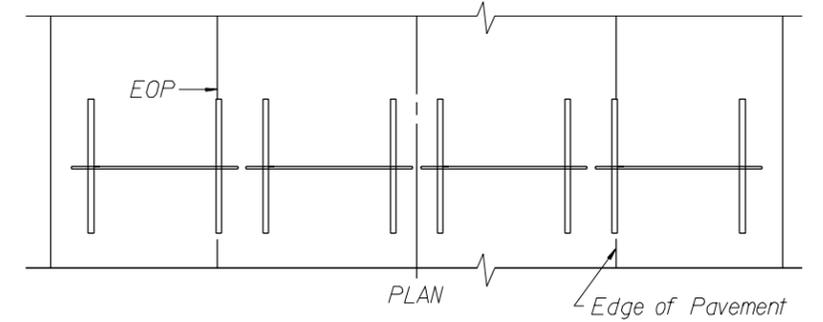


PLAN

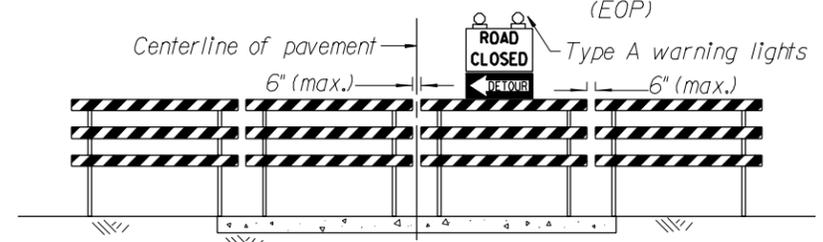


ELEVATION

ROAD CLOSED TO ALL TRAFFIC

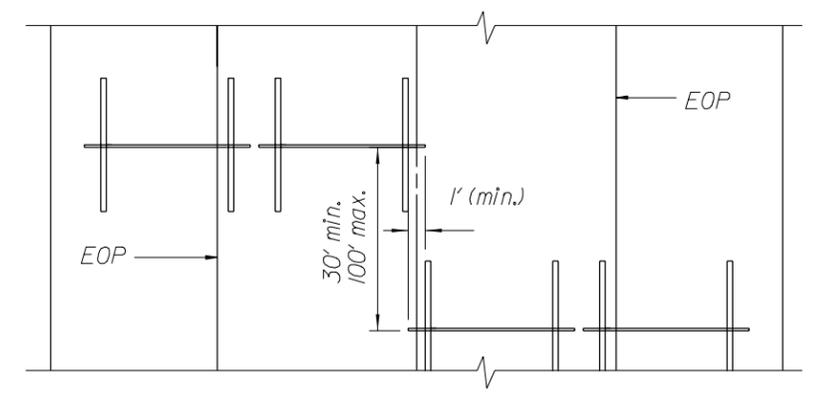

PLAN

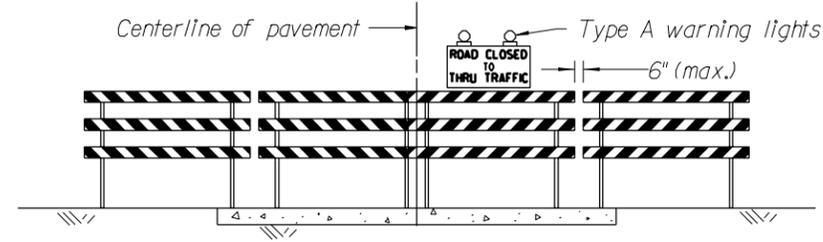

ELEVATION

ROAD CLOSED TO THRU TRAFFIC

TYPICAL APPLICATION OF THE TYPE III BARRICADE

Notes:

1. All lumber dimensions are nominal
2. Paint all wood support members white
3. Stripes on all barricades are 6 inches wide and sloped downward at a 45 degree angle toward the side of the barricade on which approaching traffic must pass. When the barricade is less than 3 feet wide the stripe width is 4 inches.
4. Sandbags may be used to provide additional stability to barricades. If used, sandbags are not to be placed higher than 12 inches above the ground.
5. Stripe both sides of all rail faces on barricades exposed to traffic from both directions.

02/26/2003 11:25:48 AM M:\Standard\Eng\1635x02.dgn

U.S. DEPARTMENT OF TRANSPORTATION FEDERAL HIGHWAY ADMINISTRATION EASTERN FEDERAL LANDS HIGHWAY DIVISION	
DETAIL	
CONSTRUCTION TRAFFIC CONTROL BARRICADES	
DETAIL APPROVED FOR USE ---	DETAIL
REVISED: 08/00	E635-2