




VIEW A

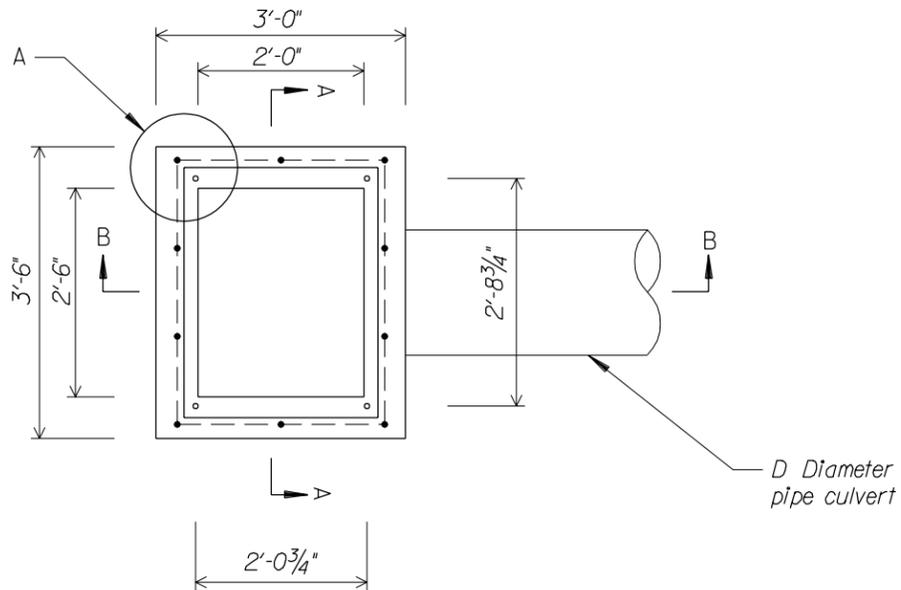


PLAN

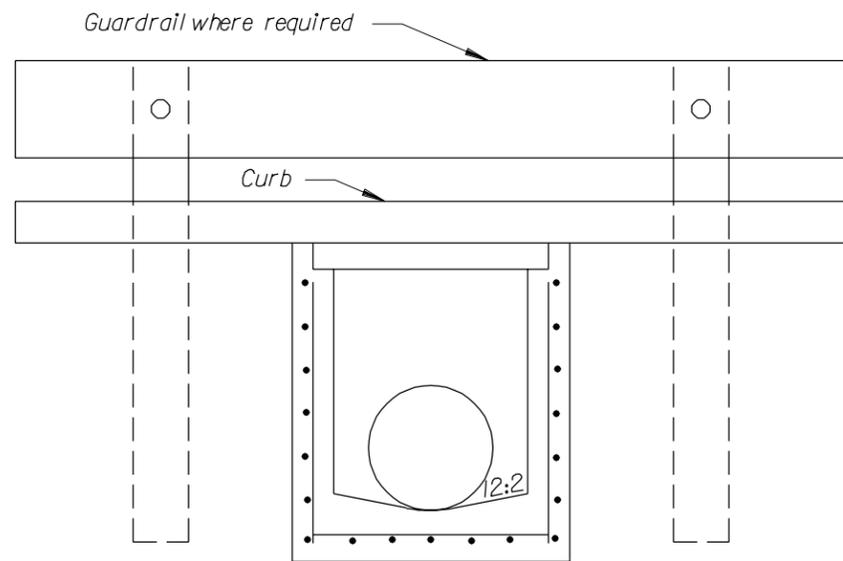

SECTION A-A

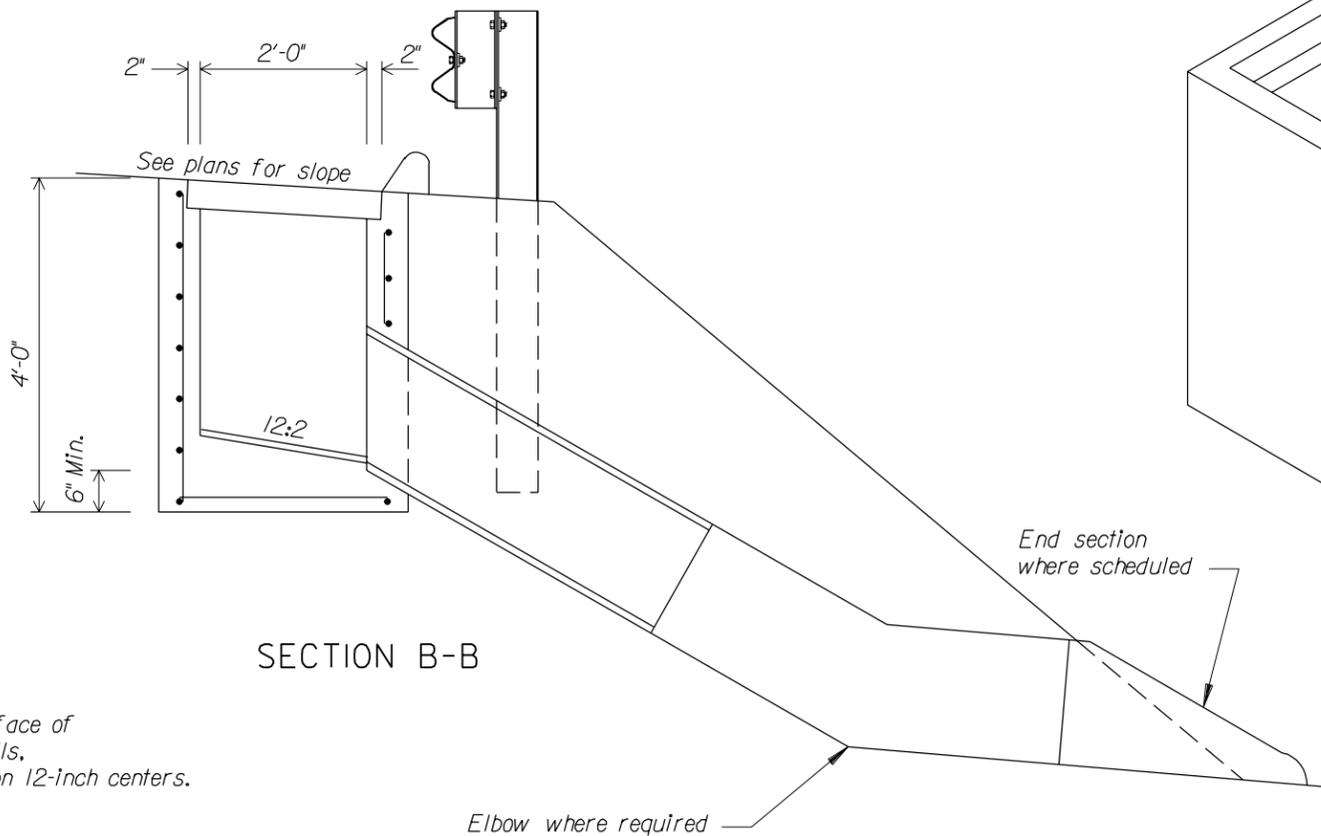

SECTION B-B

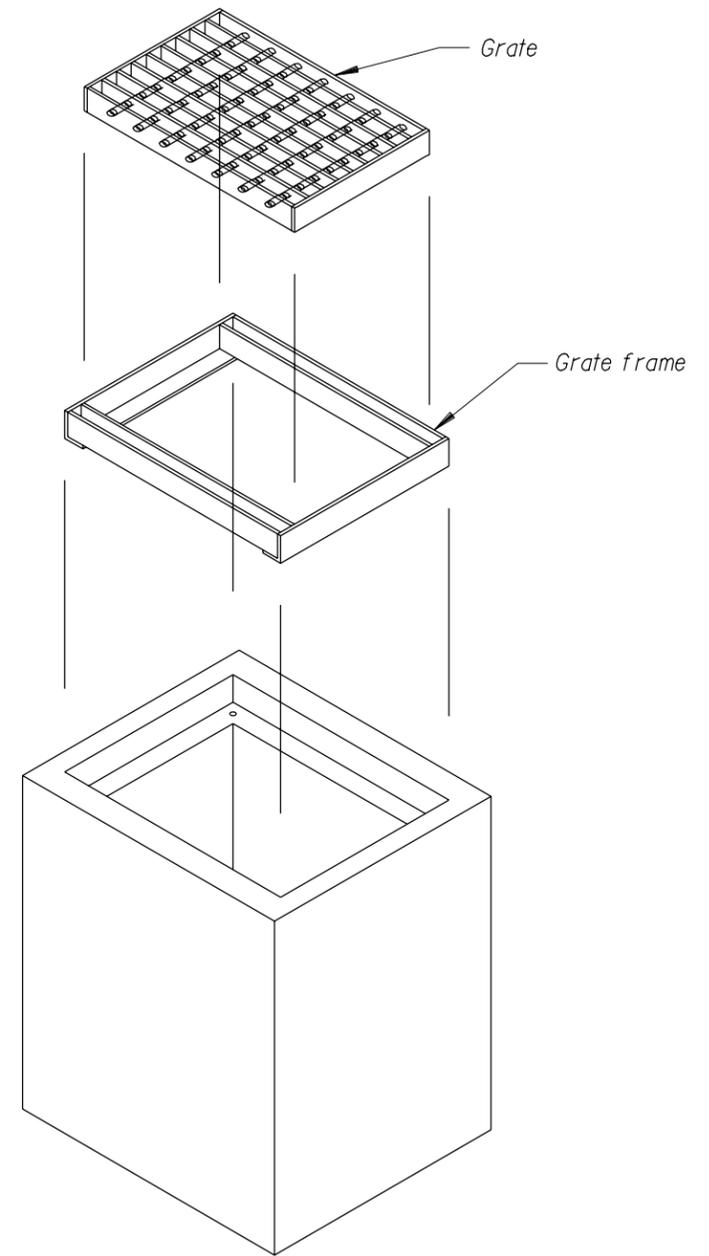

ISOMETRIC VIEW

Note:

- All reinforcing bars are #5 placed a minimum 1/2" clear from face of concrete. In floors, bars to be on 6-inch centers each way. In walls, horizontal bars to be on 6-inch centers and vertical bars to be on 12-inch centers.

U.S. DEPARTMENT OF TRANSPORTATION FEDERAL HIGHWAY ADMINISTRATION FEDERAL LANDS HIGHWAY	
STANDARD	
INLET, TYPE 5A	
STANDARD APPROVED FOR USE --/----	STANDARD
REVISED:	604-5