

**NOTES:**

1. For periods as noted in Table A, pavement may be unmarked if appropriate vehicle positioning guides are provided.
2. Typical spacing between Vehicle Position Guides is 40 ft as shown. In areas of severe curvature the spacing is 20 ft. Areas of severe curvature are shown in the plans or provided in the Vehicle Positioning Guide Schedule.
3. See Section 718.21(b) requirements for vehicle positioning guides.
4. When ADT > 1000 and special hazards are present, supplement the R4-1 sign at the beginning of each no passing zone with a W14-3 sign mounted on the left of the roadside.
5. Repeat R4-1 at 3,000 ft intervals minimum.

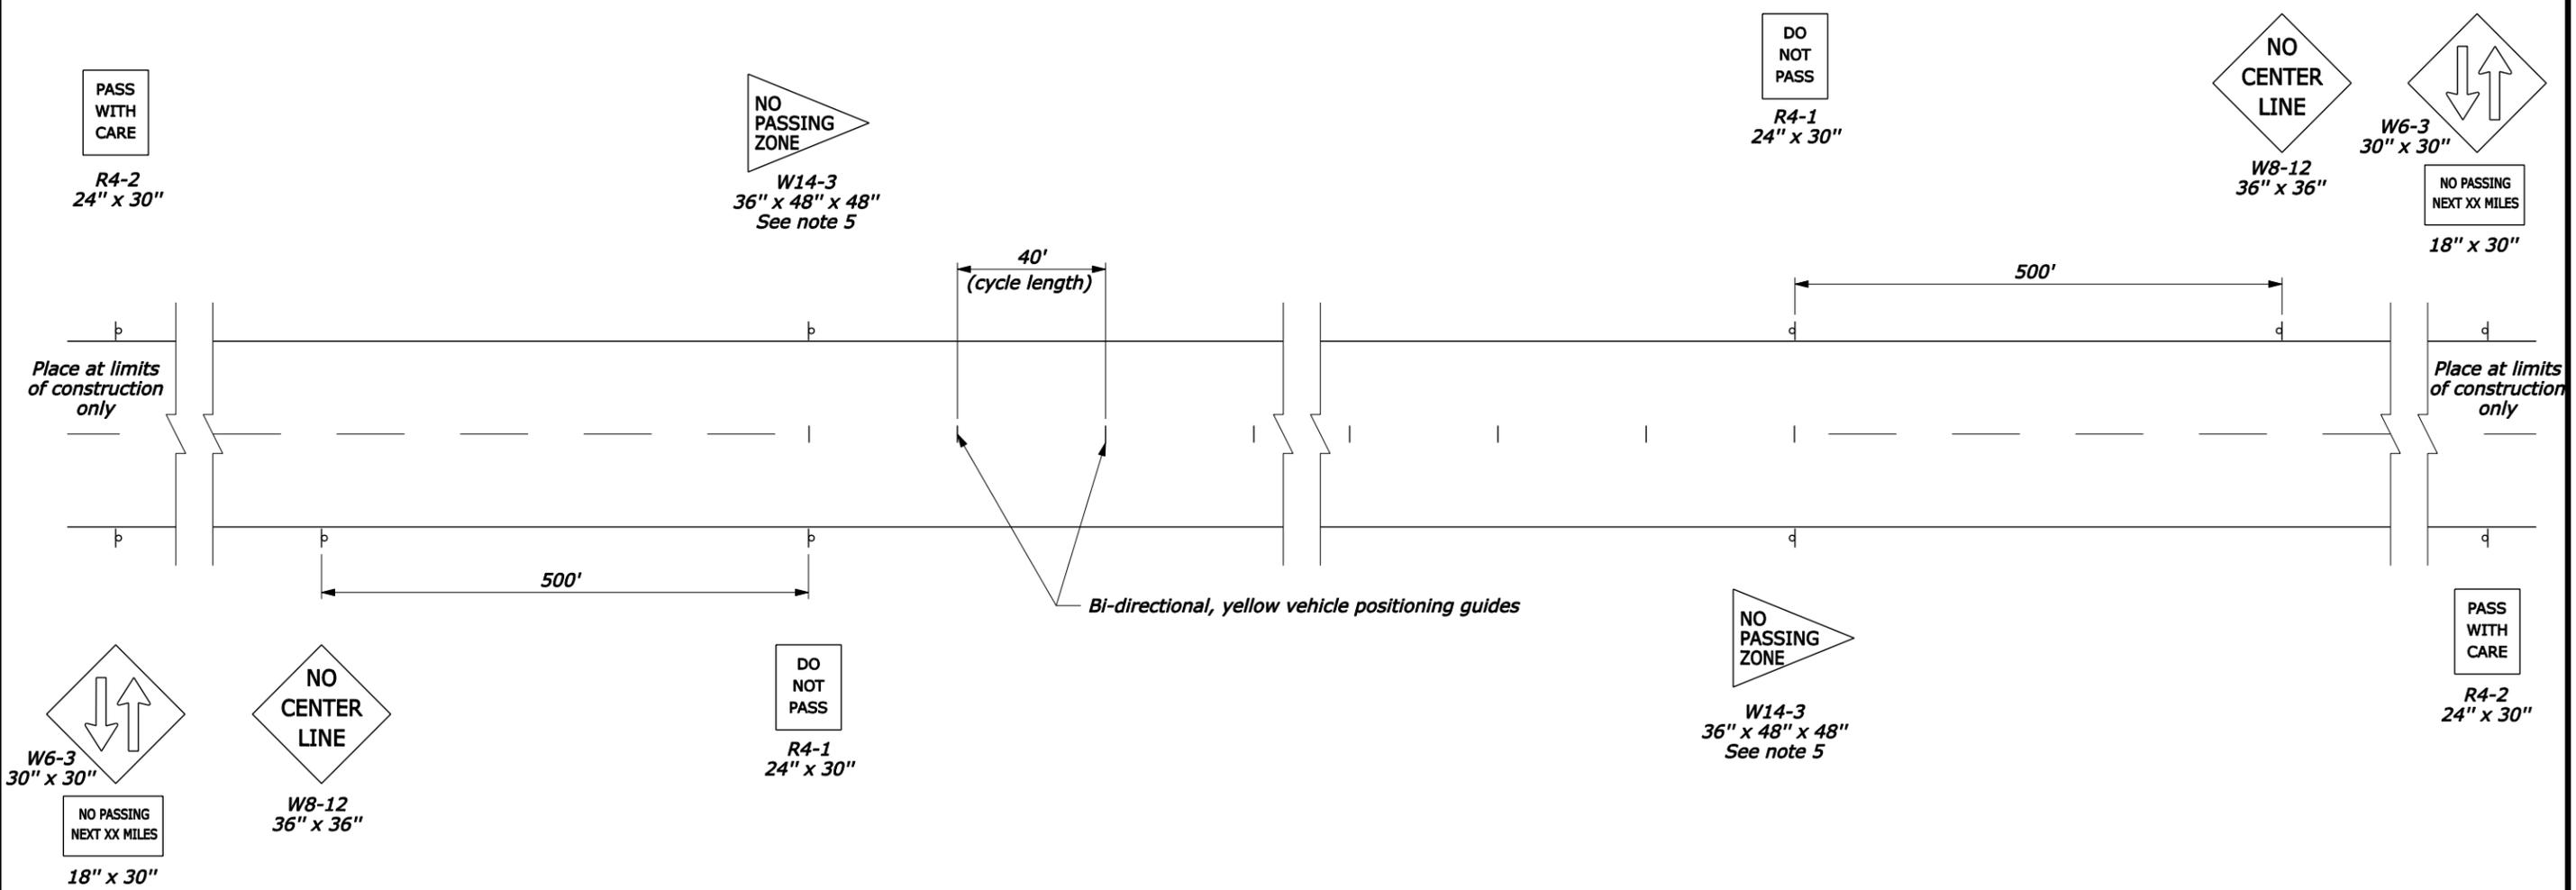


TABLE A	
ADT	MAXIMUM DURATION BEFORE MARKINGS ARE REQUIRED
≤ 1000	14 Days
> 1000	3 Days

U.S. DEPARTMENT OF TRANSPORTATION  
FEDERAL HIGHWAY ADMINISTRATION  
EASTERN FEDERAL LANDS HIGHWAY DIVISION

U.S. CUSTOMARY DETAIL

**VEHICLE POSITIONING GUIDES  
FOR TEMPORARY USE WITH  
UNMARKED PAVEMENTS**

DETAIL APPROVED FOR USE	DETAIL
APPROVED : MAY 2011	E635-14

NO SCALE