




**ANGULAR PARKING**

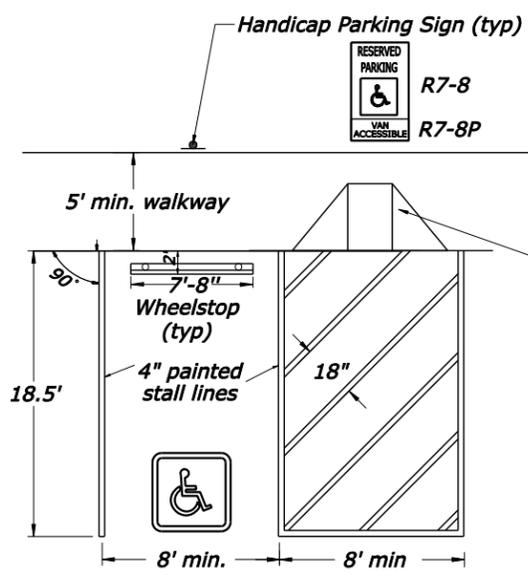

**SINGLE PARKING SPACE  
HEAD-ON PARKING  
WITH VAN ACCESSIBLE AISLE  
FOR HANDICAP ACCESS**

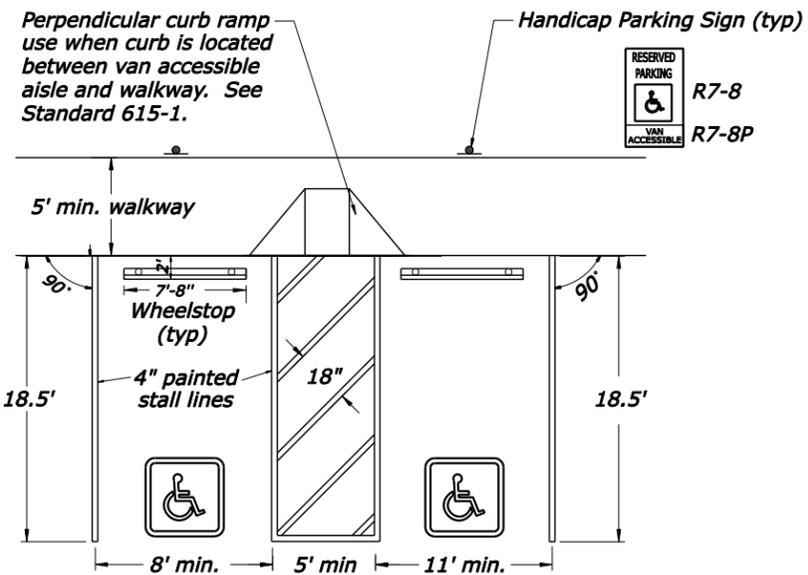

**DOUBLE PARKING SPACE  
HEAD-ON PARKING  
WITH VAN ACCESSIBLE AISLE  
FOR HANDICAP ACCESS**

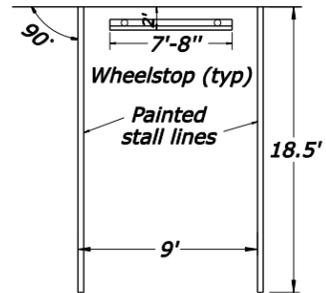

**HEAD-ON PARKING**

**CHART A**  
Required Accessible Spaces in Parking Areas\*

Total Parking Spaces in Parking Area	Required Minimum Number of Accessible Spaces
1 to 25	1
26 to 50	2
51 to 75	3
76 to 100	4
101 to 150	5
151 to 200	6
201 to 300	7
301 to 400	8
401 to 500	9
501 to 1,000	2 percent of total
over 1,000	20 plus 1 for each 100

\* Chart based on "Americans with Disabilities Act" Design Guide.

**CHART B**  
Parking Layout Dimensions for 9-ft. wide stalls\*

Angle A	45°	60°	75°	90°
Minimum Length of stall B	25'	22'	20'	18.5'
Stall width, C, parallel to aisle	12.7'	10.4'	9.3'	9.0'

\* Chart based on dimensions recommended in "Parking Principles".

U.S. DEPARTMENT OF TRANSPORTATION  
FEDERAL HIGHWAY ADMINISTRATION  
EASTERN FEDERAL LANDS HIGHWAY DIVISION

U.S. CUSTOMARY DETAIL

**PAVEMENT MARKINGS  
IN PARKING AREAS**

DETAIL APPROVED FOR USE

APPROVED : MAY 2011

DETAIL  
E634-05

NO SCALE